


5mm p.

Note fin fits tightly over stab. Fin is recured at stern post, but LE is left free. stab is glued to longerons at L.E. but TE is left free. Thus fin and stab can be adjusted and secured with tiny drop of cyano when model is on trim.

Use 1/20 indoor quality balsa for longerons, spars and wing & stab L.E. & T.E.

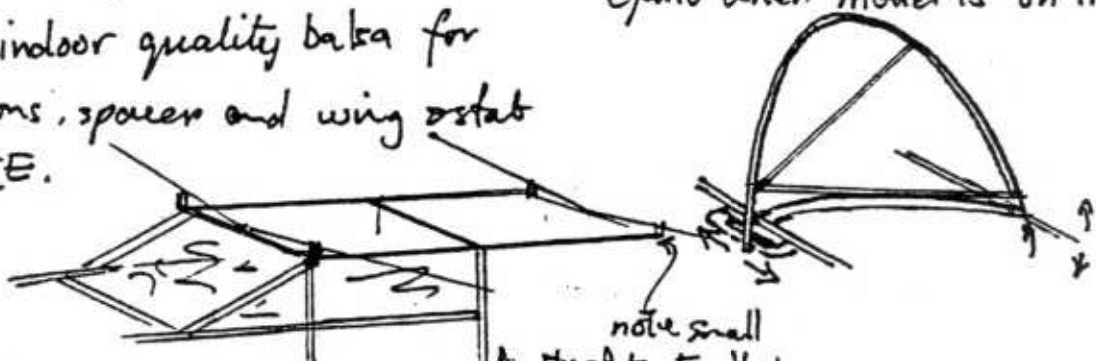

cover wings } polypropylene;
stab. } suggest well crumpled
fin. } to give rough surface.

This is perhaps beneficial aerodynamically as well as being pleasing aesthetically.

MOTOR Suggest start with .050" approx 33cms long. Be prepared to experiment with cross section and length.

